

09-21-00

A

09/20/00

09/20/00  
U.S. PTO

JC675 U.S. PTO  
09/20/00  
09/20/00

ORIGINAL/CIP PATENT APPLICATION TRANSMITTAL LETTER

ATTORNEY'S DOCKET NO  
RD-27,100

TO THE ASSISTANT COMMISSIONER FOR PATENTS:

Transmitted herewith for filing is the ☒ ORIGINAL ☐ CONTINUATION-IN-PART patent application of:  
James C. Carnahan and Paul E. Gundlack

Inventor(s)

For METHOD AND APPARATUS FOR RAPID DETERMINATION OF POLYMER MOLECULAR WEIGHT

(Title of Invention)

☐ This is a Continuation-In-Part of Serial No. \_\_\_\_\_, filed \_\_\_\_\_, Attorney Docket No. \_\_\_\_\_

ENCLOSED ARE:

- ☒ Specification having 20 total pages.
- ☒ 3 sheets of ☐ formal ☒ informal drawings.
- ☒ Declaration. ☐ Unsigned Declaration.
- ☐ Information Disclosure Statement.
- ☐ Other \_\_\_\_\_
- ☒ An Assignment of the invention to General Electric Company with cover sheet.

The filing fee is calculated below:

	NUMBER FILED	NUMBER EXTRA	RATE	BASIC FEE
				\$690.00
TOTAL CLAIMS	37 - 20 =	17	x \$18.00	\$306.00
INDEPENDENT CLAIMS	5 - 3 =	2	x \$78.00	\$156.00
ADDITIONAL FEE FOR USE OF MULTIPLE DEPENDENT CLAIM(S) (once per application)			x \$260.00	
TOTAL FILING FEE				\$1,152.00

- ☒ Please charge \$1,152.00 to my Deposit Account No. 07-0868.
- ☒ The Assistant Commissioner is hereby authorized to charge payment of all fees required under 37 CFR 1.16 or 1.17 or credit any overpayment to Deposit Account No. 07-0868.

9/19/00  
date

Noreen P. Johnson  
Attorney Noreen C. Johnson  
Reg. No 38,929

Send Correspondence to:  
General Electric Company  
CRD Patent Docket Rm 4A59  
P.O. Box 8, Bldg. K-1 -Salamone  
Schenectady, New York 12301

"Express Mail" mailing label number EL64145460345  
Date of Deposit 9/20/00

Customer Number: 006147

Three copies of this form are enclosed

METHOD AND APPARATUS FOR RAPID  
DETERMINATION OF POLYMER MOLECULAR  
WEIGHT

## BACKGROUND OF THE INVENTION

5           The present invention relates to analysis of polymer resins. In particular, the invention relates to determination of polymer molecular weight.

10           Early methods for the determination of polymer molecular weight relied on chromatographic separation and comparison to polymer standards with narrow, known molecular weight distributions. These methods were very slow and subject to large experimental errors.

15           The use of light scattering methods for polymer characterization, pioneered by Zimm (see, for example, *Journal of Chemical Physics*, volume 16, number 12, pages 1099-1116 (1948)), offered the advantage of absolute determination of molar mass. Light scattering methods have been used in static and flow analysis systems for characterization of polymer solutions without separation, but these measurements are unsuitable for analysis of polymerization reaction mixtures because the presence of low molecular weight reactants, products, and catalysts interferes with the accurate determination of average molecular weight for the polymeric component of the reaction mixture.

20           When paired with size exclusion chromatography and a concentration detection method such as differential refractive index, light scattering detection enables precise characterization of the molecular weight distribution of polydisperse polymer samples. See, for example, P. J. Wyatt, *Analytica Chimica Acta*, volume 272, pages 1-40 (1993). However, known methods combining chromatographic  
25           separation and light-scattering detection require several minutes for analysis of each sample.

30           When modern combinatorial methods are used to screen polymerization reaction conditions or catalyst materials, there is often a desire to determine the average molecular weight of the product polymer. However, the large number of samples generated by combinatorial methods can easily overwhelm the traditional analyses described above.

There is therefore a need for an analytical method that enables rapid molecular weight determination of polymer resins, is free from interferences by small molecules, and is easily automated.

#### BRIEF SUMMARY OF THE INVENTION

5 Rapid determination of the average molecular weight of aromatic polycarbonate resins is provided by a method comprising:

injecting a known volume of an analytical sample comprising a polymer into a flow analysis system comprising a chromatographic column, a concentration detector, and a molar mass detector;

10 effecting a minimally dispersive separation of the analytical sample with the chromatographic column to yield a high molecular weight fraction;

determining the polymer concentration in the high molecular weight fraction using the concentration detector;

15 determining the molar mass in the high molecular weight fraction using the molar mass detector; and

deriving an average molecular weight from the polymer concentration and the molar mass;

wherein the total analysis time is not greater than about 5 minutes per sample.

#### 20 BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram of a system for determining polymer molecular weight; the concentration and molar mass detectors are linked in series.

FIG. 2 is a block diagram of a system for determining polymer molecular weight; the molar mass detector is off-line from the main sample flow.

25 FIG. 3 is a chromatogram showing rapid separation of a polycarbonate high molecular weight fraction (HMWF) from reactant diphenyl carbonate (DPC), reactant bisphenol A (BPA), and product phenol in a polycarbonate polymerization reaction mixture; ultraviolet detection was employed.

FIG. 4 shows chromatograms for light scattering (A) and differential refractive index (B) detection of the high molecular weight fraction of a polycarbonate polymerization reaction mixture.

#### DETAILED DESCRIPTION OF THE INVENTION

5 Rapid determination of polymer average molecular weight is provided by a method comprising:

injecting a known volume of an analytical sample comprising a polymer into a flow analysis system comprising a chromatographic column, a concentration detector, and a molar mass detector;

10 effecting a minimally dispersive separation of the analytical sample with the chromatographic column to yield a high molecular weight fraction;

determining the polymer concentration in the high molecular weight fraction using the concentration detector;

15 determining the molar mass in the high molecular weight fraction using the molar mass detector; and


deriving an average molecular weight from the polymer concentration and the molar mass;

wherein the total analysis time is not greater than about 5 minutes per sample.

20 The method comprises injecting a known volume of an analytical sample comprising a polymer in solution. The polymer may be organic or inorganic, biological or non-biological in origin. In a preferred embodiment, the polymer is a non-biological organic polymer. In a more preferred embodiment, the polymer is a polycarbonate, polyester, polyamide or polyimide. In a highly preferred embodiment,  
25 the polymer comprises an aromatic polycarbonate or a polyester.


Aromatic polycarbonates are a well-known class of polymers and their preparation is described in, among many others, U.S. Patent Nos. 3,028,365 to Schnell et al. 3,334,154 to Kim, 3,989,672 to Vestergaard, 4,131,575 to Adelman et al., and 5,606,008 to Sakashita et al.; and Japanese Unexamined Patent Publications JP 2000-

063507-A, JP 11-005837-A and JP 11-158261-A. Aromatic polycarbonates comprise repeating units of the formula



wherein A<sup>1</sup> is a divalent aromatic radical derived from a dihydric phenol. The dihydric phenol employed to provide such aromatic polycarbonate polymers is a mononuclear or polynuclear aromatic compound containing as functional groups two hydroxyl radicals, each of which is attached directly to a carbon atom of an aromatic nucleus. Typical dihydric phenols include 2,2-bis-(4-hydroxyphenyl)propane (also known as bisphenol A or BPA); hydroquinone; resorcinol; 2,2-bis-(4-hydroxyphenyl)pentane; 2,4'-dihydroxydiphenylmethane; bis-(2-hydroxyphenyl)methane; bis-(4-hydroxyphenyl)methane; bis-(4-hydroxy-5-nitrophenyl)methane; 1,1-bis-(4-hydroxyphenyl)ethane; 3,3-bis-(4-hydroxyphenyl)pentane; 2,2'-dihydroxydiphenyl; 2,6-dihydroxynaphthylene; bis-(4-hydroxyphenyl)sulfone; 2,2'-dihydroxydiphenylsulfone; 4,4'-dihydroxydiphenylether; 4,4'-dihydroxy-2,5-diethoxydiphenylether; and 1,1-bis(3-methyl-4-hydroxyphenyl)cyclohexane. A variety of additional dihydric phenols are disclosed in U.S. Patent No. 2,999,835 to Goldberg. It is possible to employ two or more different dihydric phenols, or a dihydric phenol in combination with a glycol, a hydroxy or acid-terminated polyester, or a dibasic acid in order to prepare a carbonate copolymer. Such carbonate copolymers are expressly encompassed by the term "aromatic polycarbonates" as used hereinafter. Preferred dihydric phenols include bis-(2-hydroxyphenyl)-methane, 1,1-bis-(4-hydroxyphenyl)ethane, 2,2-bis-(4-hydroxyphenyl)propane, 2,2-bis-(4-hydroxyphenyl)pentane, and 1,1-bis(3-methyl-4-hydroxyphenyl)cyclohexane. A highly preferred dihydric phenol is 2,2-bis-(4-hydroxyphenyl)propane.

Polyesters suitable for analysis include those comprising repeating units of the formula



wherein each R is independently a divalent aliphatic, alicyclic, or aromatic hydrocarbon or polyoxyalkylene radical; and each A<sup>2</sup> is independently a divalent aliphatic, alicyclic, or aromatic radical. The R radical may be, for example, a C<sub>2-10</sub> alkylene radical, a C<sub>6-10</sub> alicyclic radical, a C<sub>6-20</sub> aromatic radical, or a polyoxyalkylene radical in which the alkylene groups contain about 2-6 and most often 2 or 4 carbon atoms. Specific R radicals may be those derived from diols including ethylene glycol, propylene glycols, butylene glycols, cyclohexanedimethanol, cyclobutanedimethanol, or any of the dihydric phenols described above in relation to polycarbonates. The A<sup>2</sup> radical may be derived from terephthalic acid, isophthalic acid, naphthalene dicarboxylic acid, cyclohexane-1,4-dicarboxylic acid, cyclohexane-1,3-dicarboxylic acid, and aliphatic dicarboxylic acids such as oxalic acid, maleic acid, succinic acid, glutaric acid, adipic acid, pivalic acid, and longer chain di-acids. The A<sup>2</sup> radical is most often p-phenylene or m-phenylene, or a mixture thereof. Specific polyesters include the poly(alkylene terephthalates), the poly(alkylene isophthalates), the poly(alkylene naphthalates), and the polyarylates. Such polyesters are described in, for example, U.S. Patents Nos. 2,465,319; 2,720,502; 2,727,881; 2,822,348; 3,047,539; 3,671,487; 3,953,394; and 4,128,526.

In a preferred embodiment, the analytical sample comprises a polymerization reaction mixture. Thus, the sample may comprise, for example, reactants (e.g., monomers), catalysts, pH buffers, and non-polymeric products, in addition to oligomeric and polymeric products of polymerization. When the polymer comprises an aromatic polycarbonate, the reaction mixture may comprise, for example, the reactants diphenyl carbonate and bisphenol A, the product phenol, and a catalyst, in addition to polycarbonate oligomers and polymers.

The analytical sample may be prepared by dissolving the polymer in a suitable solvent. Choice of a suitable solvent will, of course, depend, among other factors, on the chemical composition of the polymer, its molecular weight, and the desired concentration of the resulting solution. For most polymers, suitable solvents are well known in the art. For other polymers, suitable solvents may be determined with minimal experimentation, as, for example, by surveying polymer solubility in a limited set of solvents or solvent mixtures spanning a range of solvation parameters. When the polymer comprises aromatic polycarbonate, suitable solvents include benzene, toluene, xylene, chloroform, tetrahydrofuran, chlorobenzene, dichlorobenzene, trichlorobenzene, methylene chloride, trichloroethylene,

dichloroethane, methyl acetate, ethyl acetate, and mixtures comprising at least one of the foregoing solvents. Preferred solvents for aromatic polycarbonate include chloroform, tetrahydrofuran, benzene, toluene, xylene, dichloromethane, and mixtures comprising at least one of the foregoing solvents. When the polymer comprises polyester, preferred solvents include chloroform, methylene chloride, trichloroethylene, dichloroethane, hexafluoroisopropanol, and mixtures comprising at least one of the foregoing solvents.

In a preferred embodiment, a plurality of analytical samples comprising polymer are provided. In a highly preferred embodiment, a plurality of analytical samples are provided, having been prepared from at least one combinatorial sample array. Specifically, the at least one sample array comprises a plurality of spatially differentiated sites, each site comprising a polymer resin. Each site may represent, for example, a distinct set of polymerization reaction conditions in one well of a 96-, 384-, or 1536-well plate. Such multi-well plates are well known and they may be obtained commercially or prepared by published methods. The exact number of analytical samples constituting a plurality may vary widely, from two to about one million or more. For example, U.S. Patent No. 5,854,684 to Stabile et al. describes analytical matrices comprising at least one million samples arranged in a density of at least about 10 sites per square centimeter, and U.S. Patent No. 5,840,256 to Demers et al. provides details for a 7.25 square inch analytical matrix comprising 99,856 samples. Microscale reaction vessels and methods of delivering reagents to them are described in, for example, U.S. Patent Nos. 5,846,396 to Zanzucchi et al., 5,985,356 to Schultz et al., and 6,045,671 to Wu et al. An analytical sample corresponding to each spatially differentiated site may be prepared by adding a suitable solvent and dissolving some or all of the polymer resin. One of the advantages of the method is that the precise concentration of the polymer in the analytical sample is determined by the analysis and need not be known at the time of sample preparation. The resulting analytical solution comprising polymer may be analyzed immediately. Alternatively, the analytical solution may be stored for analysis at a later time, which may be useful, for example, when the time required to prepare an analytical sample from a given site exceeds the time required to analyze the sample.

The method comprises injecting a known volume of the analytical sample into a flow analysis system comprising a chromatographic column, a concentration detector, and a molar mass detector. The basic architecture of a flow

analysis system is shown, for example in U.S. Patent No. 3,522,725 to J. L. Waters, which describes a system comprising a solvent pump, a sample injector, a chromatographic column, and a detector. The concentration detector and the molar mass detector are described below. In the present method, a known volume of the analytical sample comprising polymer is withdrawn for analysis and injected into the system using a sample injector. Sample injectors are commercially available, and presently preferred injectors include the WISP Model 712 autosampler available from Waters Associates, and the Hewlett Packard model 1050 autoinjector available from Hewlett Packard (now Agilent Technologies). The injected sample travels through a minimum length of chromatographic tubing to at least one chromatographic column, which effects a minimally dispersive separation. A minimally dispersive separation is one that rapidly but substantially separates a high molecular weight fraction (HMWF) from a low molecular weight fraction (LMWF). The high molecular weight fraction is defined herein as comprising all oligomeric and polymeric products having at least two monomer units of at least one monomer. For example, the high molecular weight fraction of a sample comprising polycarbonate would comprise polycarbonate oligomers and polymers comprising at least two bisphenol A units. The low molecular weight fraction comprises, at minimum, any monomers from which the polymer is derived, but preferably also comprises other reagents, catalysts, and products having molecular weights lower than the molecular weights of the oligomeric and polymeric products. For example, the low molecular weight fraction of a sample comprising polycarbonate derived from bisphenol A and diphenyl carbonate would comprise bisphenol A, diphenyl carbonate, phenol and trace amounts of catalyst. A substantial separation of HMWF and LMWF is defined herein as elution of at least about 99 weight percent of the HMWF over a range of elution times that does not overlap with elution of more than about 1 weight percent of the LMWF, where the frame of reference for elution time is the concentration detector or the molar mass detector. In practical chromatographic terms, it is preferred that a baseline separation of the HMWF and the LMWF be achieved at the concentration detector and the molar mass detector. In order to enable the fastest possible analysis time, it is preferred that the minimally dispersive separation create the least possible dispersion of the HMWF while maintaining its separation from the LMWF. For example, the minimally dispersive separation may yield a high molecular weight fraction having a baseline peak width less than about 30 seconds, preferably less than about 20 seconds, more preferably less than about 10 seconds, at the molar mass detector or the concentration detector or both. Alternatively, the minimally dispersive separation



may yield a high molecular weight fraction having a peak width at half height less than about 10 seconds, preferably less than about 5 seconds, more preferably less than about 3 seconds at the molar mass detector or the concentration detector or both. It is expressly contemplated to use two or more chromatographic columns in series to achieve the minimally dispersive separation. For example, a first column could effect a separation based on polarity, and a second column could effect a separation based on molecular size.

The chromatographic column may utilize any separation technique suitable to effect the above described minimally dispersive separation. Suitable techniques include size exclusion chromatography (also known as gel permeation chromatography), reverse phase chromatography, sedimentation field flow fractionation, thermal field flow fractionation, capillary electrophoresis, and ion exchange chromatography. Size exclusion chromatographic columns are presently preferred and are commercially available as, for example, the 50x7 millimeter 100 Angstrom column available from Polymer Laboratories as part number 1110-1520.

The method further comprises determining the polymer concentration in the high molecular weight fraction using at least one concentration detector. The concentration detector utilizes one or more detection methods including infrared absorption spectroscopy, ultraviolet absorption spectroscopy, differential refractive index detection, fluorescence detection and ultrasonic detection. Sample destructive detectors such as the evaporative light scattering detector (Varex Corp. and others) may also be used but must be placed downstream of the molar mass detector or in a split stream. The use of differential refractive index detection is presently preferred. Differential refractive index detectors are commercially available as, for example, the HP 1047A detector from Hewlett Packard (now Agilent Technologies). Raw data from the in-line determination of polymer concentration correspond to a series of (x,y) points where x is the elapsed time since injection and y is the detector response. A plot of these points forms a chromatogram, and a baseline-to-baseline integration of the peak of interest yields an area that is directly proportional to the polymer concentration. In addition, the signal intensity at any point in time is proportional to the instantaneous concentration at that time. In practice, analytical samples containing known polymer concentrations may be analyzed in a calibration experiment to derive the linear function that relates peak area or signal intensity to polymer concentration.

The method further comprises determining the molar mass in the high molecular weight fraction using one or more molar mass detectors. Molar mass detection may be accomplished by a variety of methods, including light scattering, such as low angle light scattering and multiangle light scattering; and viscometry. In addition, combinations of light scattering and viscometry detection can afford confirmatory benefits in determination of molecular weight. The use of multiangle light scattering is presently preferred, although commercial 90° light scattering detectors such as those from Viscotek Corp. can also be used. Multiangle light scattering detectors are commercially available as, for example, the DAWN® DSP multiangle light scattering detector from Wyatt Technologies.

The determinations of polymer concentration and molar mass may be conducted sequentially in either order. Both determinations may be conducted on-line, i.e., as the sample is flowing in a single path with pumped solvent from the chromatographic column through both detectors to a waste reservoir. This configuration is shown in Figure 1. Alternatively, the molar mass determination may be conducted off-line after the concentration determination by diverting the high molecular weight fraction to a molar mass detector that has a cell capable of containing and effecting rapid mixing of the entire HMWF that is separable from the main flow of pumped solvent. The off-line embodiment permits more accurate determination of the average molecular weight and simplifies the calculation of average molecular weight. This is then equivalent to determination with zero dispersion or separation of the polymer but permits elimination of interfering low molecular weight substances. This configuration is shown in Figure 2.

The method further comprises deriving an average molecular weight from the polymer concentration and the molar mass. The average molecular weight may be either a weight average molecular weight or a number average molecular weight. Methods for deriving average molecular weight from molar mass and concentration detection data are well known in the art and reviewed in, for example, P. J. Wyatt, *Analytica Chimica Acta*, volume 272, pages 1-40 (1993). The derivation of an average molecular weight may include an estimation of the precision associated with the derivation. A method for such a precision determination is described in U.S. Patent No. 5,528,366 to Shortt.

A key advantage of the method is its speed. The total analysis time per sample, measured from the injection of one sample to the injection of the following sample, is not greater than about five minutes, preferably not greater than about three minutes, more preferably not greater than about one minute, yet more preferably not greater than about 40 seconds.

In a preferred embodiment, the method is automated so that preparation and analysis of a plurality of analytical samples comprising polymer are prepared and analyzed without human intervention. Such automated methods may use a solvent preparation module for robotic preparation of solvent-containing analytical samples from a plurality of solid polymer samples, such as samples in a combinatorial library. Methods and equipment, including commercially available equipment, for automating sample preparation and analysis are known to those of ordinary skill in the art. Solvent addition to polymers in array plates may be made in a single action via equipment such as Quadra 96 Model 230 automatic pipettors or serially by any of a number of commercially available dosing robots and pipettors. Manufacturers include, for example, Gilson, Hamilton, Zinnser, and Packard Instruments. Such automated methods for sample preparation and analysis may include the use of variable temperatures, pressures and atmospheres.

In addition to the method described above, the invention encompasses a system for rapidly determining the average molecular weight of a polymer. Figure 1 shows a block diagram for an analytical system 1 for determining molecular weight in samples comprising polymer. The system comprises a solvent reservoir 3, a solvent delivery system 5 for providing a flow of solvent that carries the sample through the system 1; an (optional) sample preparation module 7 for preparing analytical sample solutions from polymer samples; an autoinjector 9 for injecting a known portion of each analytical sample 11 into the system; a chromatographic column 13 for separating the high molecular weight fraction of the injected portion of analytical sample 11; a concentration detector 15 for determining the concentration of polymer in the high molecular weight fraction of the analytical sample 11; a molar mass detector 17 for determining the molar mass of the high molecular weight fraction of the analytical sample 11; a waste reservoir 19; and an (optional) computer 21 for deriving an average molecular weight from the polymer concentration and molar mass, and, optionally, for responsively controlling one or more of the solvent delivery system 5, the sample preparation module 7, the autoinjector 9, the concentration

detector 15, and the molar mass detector 17. Although this embodiment is not shown, the molar mass detector 17 may precede the concentration detector 15. In a preferred embodiment, the system performs automated analyses of a plurality of analytical samples.

5                   An alternative embodiment is shown in Figure 2. The components and configuration are the same as shown and described for Figure 1, except that the molar mass detector 17 is off-line from the main flow of solvent through the system, and a valve 23 controls selective diversion of the high molecular weight fraction to the molar mass detector 17 and subsequently to waste after completion of the analysis.

10                   The invention is further illustrated by the following non-limiting example.

#### EXAMPLE

15                   This example demonstrates the rapid determination of weight average molecular weights for a variety of polycarbonate samples. A Waters Associates Model 590 pump, a Waters Associates WISP Model 712 autosampler and a 50x7 millimeter 100 Angstrom column from Polymer Laboratories (Part number 1110-1520) were connected in series to a Waters Assoc. Model 441 Absorbance detector, a Wyatt Technology Corporation DAWN® DSP multi-angle light scattering photometer and an HP 1047A Differential Refractive Index (DRI) detector. This arrangement  
20                   corresponds to the configuration of Figure 1. The flow rate of the chloroform solvent was 2.0 milliliters per minute, giving a total analysis time of less than one minute. The results of analysis of polycarbonate standards and of resins prepared by melt polymerization of bisphenol A and diphenylcarbonate gave the results in the Table, below. Each sample was analyzed at least twice at 30, 50 and 200 microliter ( $\mu\text{L}$ )  
25                   injection volumes, and a weight average molecular weight ( $M_w$ ) was calculated for each run based on data from the concentration and molar mass detectors. In the four cases in which a sample was analyzed three times at the same injection volume, a relative standard deviation (RSD) was calculated. An example of the fast chromatography utilizing the UV detector as concentration detector is shown in  
30                   Figure 3. This chromatogram shows that the high molecular weight fraction (HMWF) has finished eluting after about 0.6 minutes, indicating that a time between injections of about 0.6 minutes is feasible if overlapping injections are employed. Example of

light scattering (A) and differential refractive index (B) traces collected at a slower flow rate are shown in Figure 4.

Table

Sample Number	Injection Volume ( $\mu\text{L}$ )	$M_w(\text{DRI})$	RSD (DRI)
1	30	19200	0.46%
	30	19170	
	50	18520	
	50	19000	
	200	17100	
	200	17190	
2	200	17000	0.5%
	30	11190	
	30	11360	
	50	10950	
	50	11060	
	200	10150	
3	200	10280	
	200	10220	
	30	33980	
	30	33870	
	50	32350	
	50	32970	
	200	30160	
	200	29850	

This example shows that determinations of average molecular weight can be conducted for a plurality of samples with a total analysis time of about 36 seconds per sample. The repeatability of the determination over a range of injection volumes shows that the method of in-line determination of polymer concentration corrects for sample size or concentration.

All cited patents and other references are incorporated herein by reference.

## WHAT IS CLAIMED IS:

1. A method for the determination of polymer molecular weight, comprising:

5 injecting a known volume of an analytical sample comprising a polymer into a flow analysis system comprising a chromatographic column, a concentration detector, and a molar mass detector;

effecting a minimally dispersive separation of the analytical sample with the chromatographic column to yield a high molecular weight fraction;

10 determining the polymer concentration in the high molecular weight fraction using the concentration detector;

determining the molar mass in the high molecular weight fraction using the molar mass detector; and

deriving an average molecular weight from the polymer concentration and the molar mass;

15 wherein the total analysis time is not greater than about 5 minutes per sample.

2. The method of claim 1, wherein the polymer comprises a polyester.

3. The method of claim 2, wherein the polyester is synthesized from at least one dicarboxylic acid selected from the group consisting of terephthalic acid, isophthalic acid, naphthalene dicarboxylic acid, cyclohexane-1,4-dicarboxylic acid, cyclohexane-1,3-dicarboxylic acid, oxalic acid, maleic acid, succinic acid, glutaric acid, adipic acid, and pivalic acid; and at least one diol selected from the group consisting of ethylene glycol, propylene glycols, butylene glycols, cyclohexanedimethanol, cyclobutanedimethanol, 2,2-bis-(4-hydroxyphenyl)propane, hydroquinone, resorcinol, 2,2-bis-(4-hydroxyphenyl)pentane, 2,4'-dihydroxydiphenylmethane, bis-(2-hydroxyphenyl)methane, bis-(4-hydroxyphenyl)methane, bis-(4-hydroxy-5-nitrophenyl)methane, 1,1-bis-(4-hydroxyphenyl)ethane, 3,3-bis-(4-hydroxyphenyl)pentane, 2,2'-dihydroxydiphenyl, 2,6-dihydroxynaphthylene, bis-(4-hydroxyphenyl)sulfone, 2,2'-

20

25

dihydroxydiphenylsulfone, 4,4'-dihydroxydiphenylether, 4,4'-dihydroxy-2,5-diethoxydiphenylether, and 1,1-bis(3-methyl-4-hydroxyphenyl)cyclohexane.

4. The method of claim 1, wherein the polymer comprises an aromatic polycarbonate.

5. The method of claim 4, wherein the aromatic polycarbonate is synthesized from at least one dihydric phenol selected from the group consisting of 2,2-bis-(4-hydroxyphenyl)propane; hydroquinone; resorcinol; 2,2-bis-(4-hydroxyphenyl)pentane; 2,4'-dihydroxydiphenylmethane; bis-(2-hydroxyphenyl)methane; bis-(4-hydroxyphenyl)methane; bis-(4-hydroxy-5-nitrophenyl)methane; 1,1-bis-(4-hydroxyphenyl)ethane; 3,3-bis-(4-hydroxyphenyl)pentane; 2,2'-dihydroxydiphenyl; 2,6-dihydroxynaphthylene; bis-(4-hydroxyphenyl)sulfone; 2,2'-dihydroxydiphenylsulfone; 4,4'-dihydroxydiphenylether; 4,4'-dihydroxy-2,5-diethoxydiphenylether; and 1,1-bis(3-methyl-4-hydroxyphenyl)cyclohexane.

6. The method of claim 4, wherein the analytical sample comprising aromatic polycarbonate is prepared by dissolving an aromatic polycarbonate resin in a suitable solvent.

7. The method of claim 6, wherein the suitable solvent is selected from the group consisting of benzene, toluene, xylene, chloroform, tetrahydrofuran, methylene chloride, trichloroethylene, dichloroethane, chlorobenzene, dichlorobenzene, trichlorobenzene, methyl acetate, ethyl acetate, hexafluoroisopropanol, and mixtures comprising at least one of the foregoing solvents.

8. The method of claim 6, wherein the suitable solvent is selected from the group consisting of benzene, toluene, xylene, chloroform, tetrahydrofuran, dichloromethane, and mixtures comprising at least one of the foregoing.

9. The method of claim 1, wherein the analytical sample comprises a polymerization reaction mixture.

10. The method of claim 9, wherein the minimally dispersive separation yields a high molecular weight fraction substantially free of monomers and polymerization catalysts.

11. The method of claim 1, wherein the chromatographic column comprises at least one size exclusion chromatographic column.

12. The method of claim 1, wherein the minimally dispersive separation yields a high molecular weight fraction having a baseline peak width less than about 30 seconds at at least one of the molar mass detector or the concentration detector.

13. The method of claim 1, wherein the minimally dispersive separation yields a high molecular weight fraction having a baseline peak width less than about 20 seconds at at least one of the molar mass detector or the concentration detector.

14. The method of claim 1, wherein the minimally dispersive separation yields a high molecular weight fraction having a baseline peak width less than about 10 seconds at at least one of the molar mass detector or the concentration detector.

15. The method of claim 1, wherein the minimally dispersive separation yields a high molecular weight fraction having a peak width at half height less than about 10 seconds at at least one of the molar mass detector or the concentration detector.

16. The method of claim 1, wherein the minimally dispersive separation yields a high molecular weight fraction having a peak width at half height less than about 5 seconds at at least one of the molar mass detector or the concentration detector.

17. The method of claim 1, wherein the minimally dispersive separation yields a high molecular weight fraction having a peak width at half height less than about 3 seconds at at least one of the molar mass detector or the concentration detector.

18. The method of claim 1, wherein the concentration detector utilizes one or more detection methods selected from the group consisting of infrared absorption spectroscopy, ultraviolet absorption spectroscopy, differential refractive index detection, fluorescence detection, ultrasonic detection, and evaporative light scattering detection.



19. The method of claim 1, wherein the molar mass detector utilizes one or more detection methods selected from the group consisting of light scattering, low angle light scattering, multiangle light scattering, and viscometry.

20. The method of claim 1, wherein the molar mass detector utilizes multiangle light scattering.

21. The method of claim 1, wherein determining the polymer concentration and determining the molar mass are conducted sequentially.

22. The method of claim 1, wherein determining the molar mass is conducted off-line.

23. The method of claim 1, wherein the total analysis time is not greater than about 3 minutes per sample.

24. The method of claim 1, wherein the total analysis time is not greater than about 1 minute per sample.

25. The method of claim 1, wherein the total analysis time is not greater than about 40 seconds per sample.

26. The method of claim 1, wherein the average molecular weight is a weight average molecular weight.

27. The method of claim 1, wherein the average molecular weight is a number average molecular weight.

28. A method for the determination of polymer molecular weight, comprising:

providing a sample array comprising a plurality of spatially differentiated sites, each site comprising a polymer resin;

preparing an analytical sample for each spatially differentiated site by dissolving the polymer resin in a suitable solvent;

injecting a known amount of each analytical sample into a flow analysis system comprising a chromatographic column, a concentration detector, and a molar mass detector;

effecting a minimally dispersive separation of each analytical sample with the chromatographic column to yield a high molecular weight fraction substantially free of monomers;

5 determining the polymer concentration in the high molecular weight fraction of each analytical sample using the concentration detector;

determining the molar mass in the high molecular weight fraction of each analytical sample using the molar mass detector; and

deriving an average molecular weight for each analytical sample based on the polymer concentration and the molar mass;

10 wherein the total analysis time is not greater than about 5 minutes per sample.

29. The method of claim 28, wherein preparing an analytical sample for each spatially differentiated site, injecting a known amount of each analytical sample, effecting a minimally dispersive separation of each analytical sample, determining the polymer concentration in the high molecular weight fraction of each analytical sample, determining the molar mass in the high molecular weight fraction of each analytical sample, and deriving an average molecular weight for each analytical sample are conducted without human intervention.

30. A method for the determination of polycarbonate molecular weight, comprising:

20 injecting a known amount of an analytical sample comprising a polycarbonate resin into a flow analysis system comprising a chromatographic column, a concentration detector, and a molar mass detector;

25 effecting a minimally dispersive separation of the analytical sample with the chromatographic column to yield a high molecular weight fraction substantially free of monomers and catalysts, wherein the high molecular weight fraction has a peak width at half height less than about 5 seconds at least one of the molar mass detector or the concentration detector;

30 determining the polycarbonate concentration in the high molecular weight fraction using a differential refractive index detector;

determining the molar mass in the high molecular weight fraction using a light scattering detector; and

deriving an average molecular weight for the polycarbonate resin from the polycarbonate concentration and the molar mass;

5 wherein the total analysis time is not greater than about 40 seconds per sample.

31. A system for the determination of polymer average molecular weight, comprising:

a solvent delivery system;

10 an autoinjector for injecting a known volume of an analytical sample comprising a polymer;

a chromatographic column for effecting a minimally dispersive separation of the analytical sample to yield a high molecular weight fraction substantially free of monomers;

15 an in-line concentration detector for determining the polymer concentration in the high molecular weight fraction; and

a molar mass detector for determining the molar mass in the high molecular weight fraction;

20 wherein the system's total analysis time is not greater than about 5 minutes per sample.

32. The method of claim 31, wherein the molar mass detector is in-line.

33. The method of claim 31, wherein the molar mass detector is off-line.

25 34. The system of claim 31, further comprising a plurality of analytical samples comprising aromatic polycarbonate.

35. The system of claim 31, further comprising a sample preparation module for automatically preparing an analytical sample by dissolving an aromatic polycarbonate resin in a suitable solvent.

5 36. The system of claim 31, further comprising a computer for deriving an average molecular weight from the polymer concentration and the molar mass, and, optionally, for responsively controlling one or more of the solvent delivery system, the autoinjector, the concentration detector, and the molar mass detector.

37. An analysis system, comprising:

a solvent delivery system;

10 an autoinjector for injecting a known volume of each of a plurality of analytical samples comprising a polymer;

a chromatographic column for effecting a minimally dispersive separation of each analytical sample to yield a high molecular weight fraction substantially free of monomers;

15 an in-line concentration detector for determining the polymer concentration in the high molecular weight fraction of each sample;

a molar mass detector for determining the molar mass in the high molecular weight fraction of each sample; and

a computer;

20 wherein the system's total analysis time is not greater than 5 minutes per sample; and wherein computer control of the solvent delivery system, the autoinjector, the concentration detector, and the molar mass detector enables analysis of the plurality of analytical samples without human intervention.

METHOD AND APPARATUS FOR RAPID DETERMINATION OF  
POLYMER MOLECULAR WEIGHT

ABSTRACT OF THE DISCLOSURE

A rapid analysis method for the determination of polymer average  
5 molecular weight separates the polymer's high molecular weight fraction and  
determines its average molecular weight using a molar mass detector and a  
concentration detector. The method avoids time consuming sample preparation,  
allows for separation of interfering low molecular weight components, and is suitable  
for automation.

10

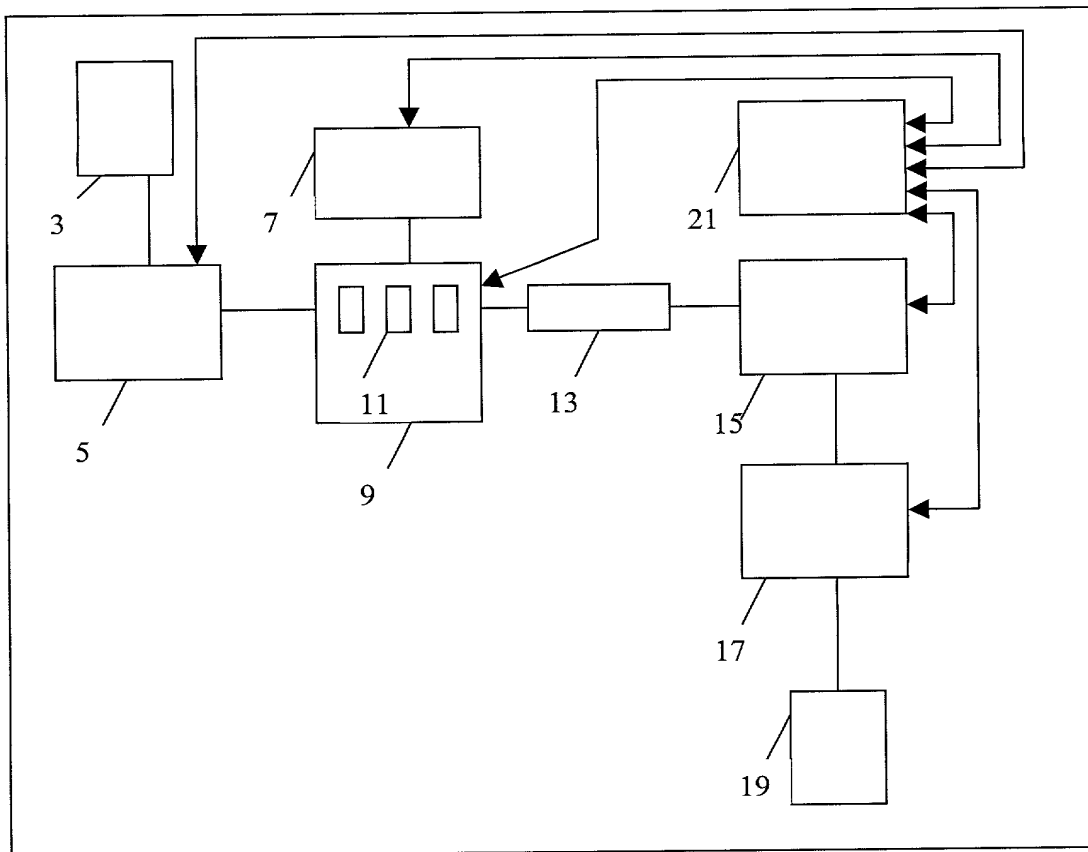


FIG. 1

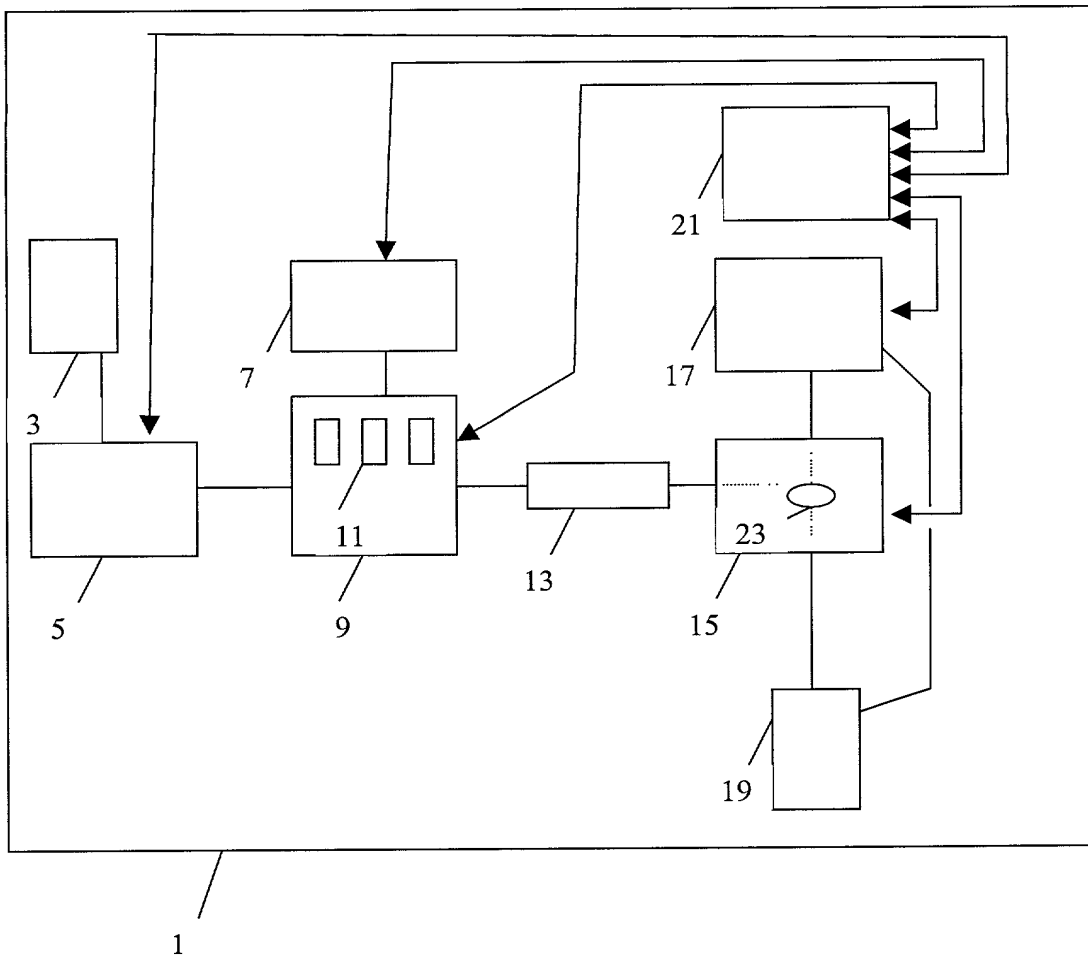


FIG. 2

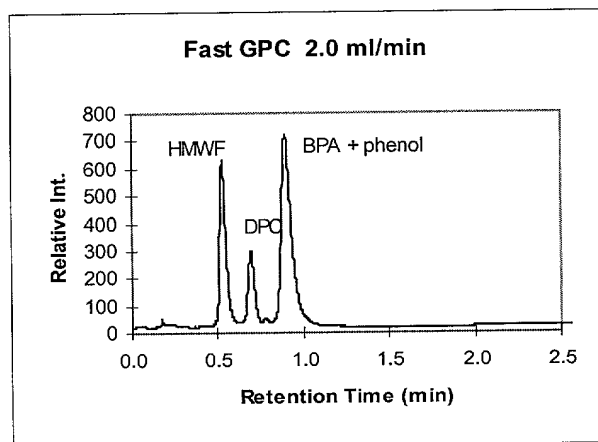


FIG. 3

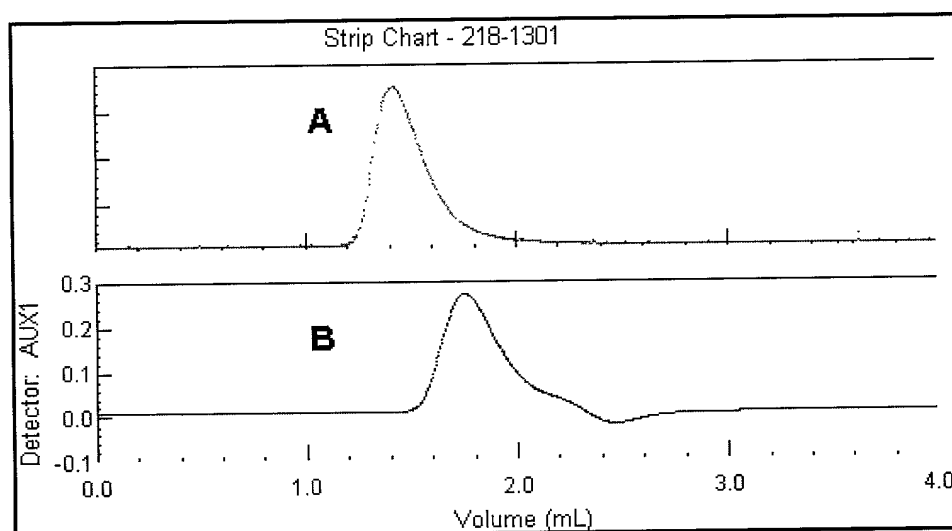


FIG. 4



# DECLARATION FOR PATENT APPLICATION

Docket Number  
RD-27100

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:  
**METHOD AND APPARATUS FOR RAPID DETERMINATION OF POLYMER MOLECULAR WEIGHT**

the specification of which is attached hereto unless the following box is checked:

☐ was filed on \_\_\_\_\_ as United States Application Number or PCT International Application Number \_\_\_\_\_  
and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations §1.56. I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

## Prior Foreign Application

Priority Claimed

☐ Yes ☐ No

☐ Yes ☐ No

I hereby claim the benefit under Title 35, United States Code, §119(e) of any **United States provisional application(s)** listed below.

(Application Number)

(Filing Date)

(Application Number)

(Filing Date)

I hereby claim the benefit under Title 35, United States Code §120 of any **United States Application(s)** listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

(Application Number)

(Filing Date)

(Status - patented, pending, abandoned)

(Application Number)

(Filing Date)

(Status - patented, pending, abandoned)

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, **CUSTOMER NO. 006147.**

Douglas E. Stoner, Reg. No. 26,509, Marvin Snyder, Reg. No. 20,126, Donald S. Ingraham, Reg. No. 33,714, Jill M. Breedlove, Reg. No. 32,684, Noreen C. Johnson, Reg. No. 38,929, Ronald E. Myrick, Reg. No. 26,315, Henry J. Policinski, Reg. No. 26,621 and Jay L. Chaskin, Reg. No. 24,030.

Address all telephone calls to: Noreen C. Johnson at telephone number (518) 387-7863

Address all correspondence to: **General Electric Company**  
**CRD Patent Docket Rm 4A59**  
**P.O. Box 8, Bldg. K-1 - Salamone**  
**Schenectady, New York 12301**



**006147**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

SOLE OR FIRST INVENTOR:

Full name: James Claude Carnahan  
First Name Middle Name Last Name  
 Signature: James Claude Carnahan Date September 11, 2500  
 Residence: Niskayuna, New York 12309 Citizenship: USA  
City and State  
 Post Office Address: 737 St. Davids Lane

SECOND JOINT INVENTOR:

Full name: Paul Edward Gundlach  
First Name Middle Name Last Name  
 Signature: Paul Edward Gundlach Date 9/18/00  
 Residence: Scotia, New York Citizenship: USA  
City and State  
 Post Office Address: 44 Marion Boulevard

THIRD JOINT INVENTOR:

Full name: \_\_\_\_\_  
First Name Middle Name Last Name  
 Signature: \_\_\_\_\_ Date \_\_\_\_\_  
 Residence: \_\_\_\_\_ Citizenship: \_\_\_\_\_  
City and State  
 Post Office Address: \_\_\_\_\_

FOURTH JOINT INVENTOR:

Full name: \_\_\_\_\_  
First Name Middle Name Last Name  
 Signature: \_\_\_\_\_ Date \_\_\_\_\_  
 Residence: \_\_\_\_\_ Citizenship: \_\_\_\_\_  
City and State  
 Post Office Address: \_\_\_\_\_